


Miniature Centrifugal Pumps


BMK3...BMK4

Peripheral impellers

BMK3

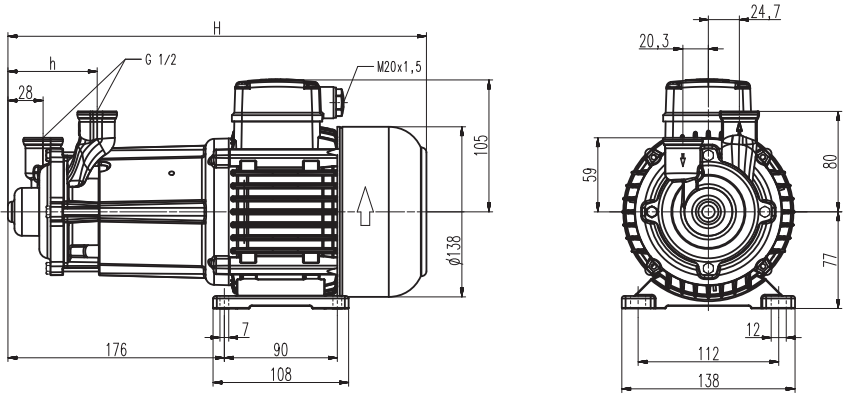

BMK4

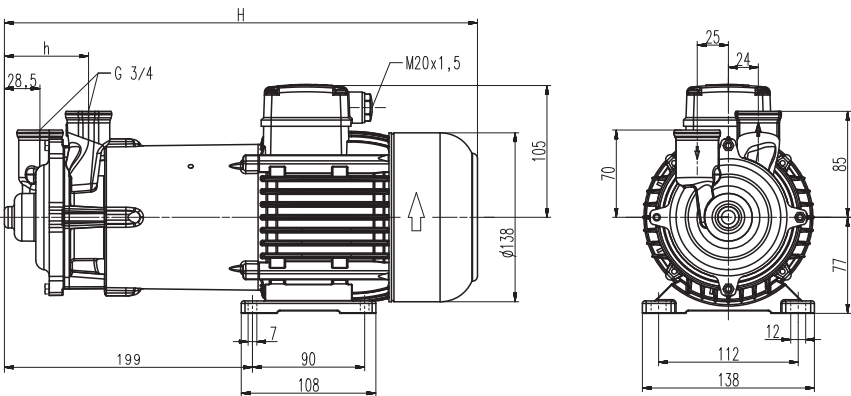

Type	Vol. del. at manom. del. head l/min /m	Dimensions		Weight kg	Power	Voltage 3 ~	Fre- quen- cy	Current	Speed
		H mm	h mm		kW	V	Hz	A	1/min
BMK3	10/35	374	71	10.8	0.63	220-240	50	2.70	2850
						380-415	50	1.56	2850
					0.725	460	60	1.46	3425
BMK4	10/48	430	67.5	14	1.1	220-240	50	4.33	2850
						380-415	50	2.50	2850
					1.27	460	60	2.4	3440

Miniature Centrifugal Pumps

of the **BMK series** have been desined for **clean water circuits** of up to 160 degree C fluid temperature and up to **7 bar** of system pressure.

The pumps are equipped with a magnet-ic coupling. The pumps can be mounted vertically or horizontally. The specific de-sign allows the pumps to operate wear poor.

Applications

Types of fluid
Industry water up to 160° C at 7 bar system-pressure

Construction

Pump body	CrNi-steel
Cover	CrNi-steel
Impeller	CrNi-steel
Shaft	Ceramic
Gasket	Split-case

Noise level	
BMK3	65 dBA
BMK4	67 dBA

