



KTF151...303, KTB200

半开式叶轮

KTF151...153 KTF301...303

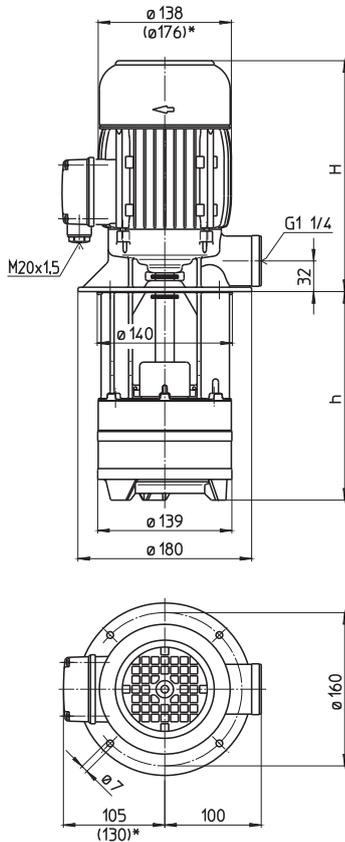

KTB200

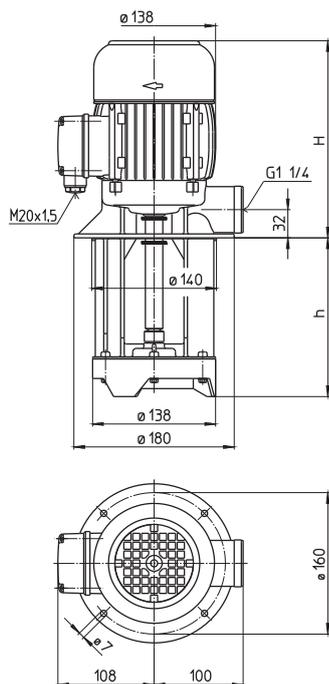

*) KTF153, KTF302, 303 尺寸

型号	流量 在某个 扬程下 l/min / m	高度 H mm	沉水 深度 h mm	重量 kg	功率 kW	电压 V 3~	频率 Hz	电流 A	转速 1/min
KTF151/140	100/11	264	140	8.7	0.63	220-240	50	2.70	2850
	220		220	9.0					
	290		290	9.5	0.725	460	60	1.46	3425
	370		370	9.7					
KTF152/180	100/20	291	180	10.5	1.1	220-240	50	4.33	2850
	260		260	11.0					
	330		330	11.5	1.27	460	60	2.4	3440
	410		410	12.0					
KTF153/220	100/32	346	220	20.5	1.7	220-240	50	6.24	2890
	300		300	21.0					
	370		370	21.5	1.95	460	60	3.5	3480
	450		450	22.0					
KTF301/140	180/10	291	140	10.0	1.1	220-240	50	4.33	2850
	220		220	10.5					
	290		290	11.0	1.27	460	60	2.4	3440
	370		370	11.5					
KTF302/180	180/20	346	180	20.0	1.7	220-240	50	6.24	2890
	260		260	20.5					
	330		330	21.0	1.95	460	60	3.5	3480
	410		410	21.5					
KTF303/220	180/33	378	220	25.0	2.6	220-240	50	9.30	2880
	300		300	25.5					
	370		370	26.0	2.94	460	60	5.1	3480
	450		450	26.5					
KTB200/120	210/2	264	120	8.0	0.63	220-240	50	2.70	2850
	200		200	8.5					
	270		270	9.0	0.725	460	60	1.46	3425
	350		350	10.0					

塑料沉水泵

KTF 和 **KTB** 系列适合于不同的供水应用。这些泵也适合于各种不同的化学液体。结构原因，不需要轴封。

应用

流体类型
工业水；热，冷，带和不带化学混合物，蒸馏水，电离水

流动黏度
...12 mm²/s (12 cSt)

工作温度
-10...+60° C

结构

泵体	POM
端盖	PP
叶轮	POM (KTB200) PPS
轴	POM (KTB200) 1.4104
可选： 轴	CrMo
噪音等级	
KTF151...KTF152	60 dBA
KTF301	
KTB200	
KTF153	65 dBA
KTF302...KTF303	

