


Horizontal End-Suction Pumps

SBG801S...803S

Axial/semi-open impellers



SBG801S...803S

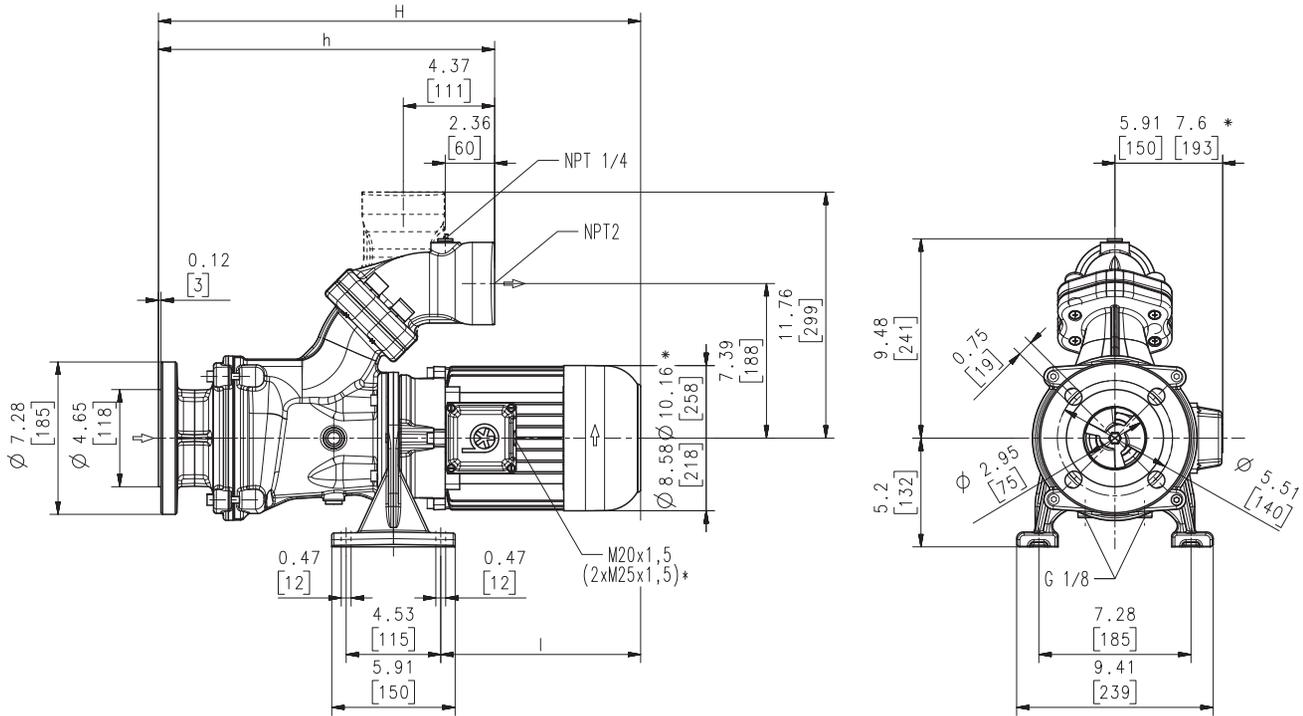

Dimensions in Inches / mm; *) Dimensions SBG802S, 803S

Type	Flow at head	Dimensions		Length		Weight		Power HP kW	Voltage 3~ V	Fre- quen- cy Hz	Current AMPS	Speed RPM		
	GPM /Feet l/min /m	H inch	H mm	h inch	h mm	l Inch	l mm						Lbs	kg
SBG801S	150/46	26.4	671	16.1	409	12.9	328	145.5	66	5.1	230	60	12.8	3520
	600/14									3.8	460	60	6.4	3520
SBG802S	150/92	32.0	812	18.9	479	15.7	399	227	103	9.2	230	60	21.2	3550
	600/26									6.9	460	60	10.6	3550
SBG803S	150/112	36.2	919	21.6	548	17.2	437	273	124	13.8	230	60	31.6	3550
	600/31									10.3	460	60	15.8	3550



Horizontal End-Suction Pumps

are centrifugal inline pumps with a compact design where the impeller is mounted onto the extended motor shaft. These pumps are not self-priming and must be gravity fed. All pumps are equipped with a single mechanical seal. Upon request a second mechanical seal is available for single-stage pumps to allow for dry-running (-GD). This pump series is designed for horizontal installations next to a tank and for pumping **highly air entrained coolant and cutting oils**, as they occur in **high speed grinding applications**. The SBG pumps are equipped with the user-friendly 45 degree **flange** connection which allows for either vertical or horizontal pipe connection and the connection of a pressure gauge with NPT 1/4. For more information see mechanical features within the technical information section.



Applications

- Types of fluid
 - coolants
 - cooling/cutting oils
 - grinding oils
- Kinematic viscosity
 - ...200 SSU (...45 mm²/s)
- Pumping temperature
 - 30...175 °F (0...80 °C)

Construction

Pump body	cast iron
Cover	cast iron
Impeller axial	cast steel
Impeller radial	cast steel
Shaft	steel
Mechanical seal	SiC
Noise level (Motor only; Tolerance +3 dBA)	
SBG801S	75 dBA
SBG802S	76 dBA
SBG803S	79 dBA

