


# 卧式端吸泵

## SBM140...450

半开式叶轮

### SBM140...450

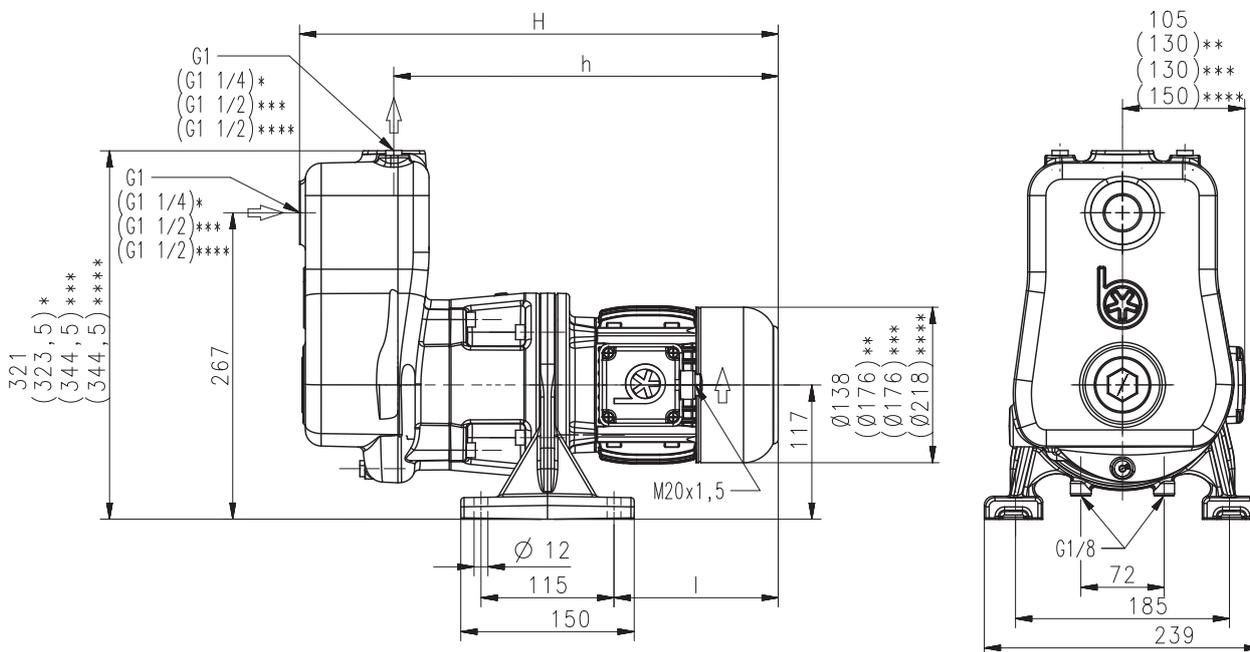

- \*) SBM315, SBM315/60 Hz 尺寸
- \*) SBM315/60 Hz 尺寸
- \*\*) SBM450 尺寸
- \*\*) SBM450/60 Hz 尺寸

型号	流量在 某个扬程下 l/min /m	尺寸		长度 l mm	重量 kg	功率 kW	电压 3 ~ V	频率 Hz	电流 A	转速 1/min
		H mm	h mm							
<b>SBM140</b>	100/8	460	373	183	28.5	0.63	220-240 380-415	50 50	2.70 1.56	2850 2850
<b>SBM140/60Hz</b>	120/12	461	375	184	29	1.06	460	60	2.1	3440
<b>SBM315</b>	200/9	497	399	211	32	1.1	220-240 380-415	50 50	4.33 2.50	2850 2850
<b>SBM315/60Hz</b>	240/14	542	444	256	46	1.95	460	60	3.5	3480
<b>SBM450</b>	240/15	586	476	289	48	1.9	220-240 380-415	50 50	6.84 3.95	2900 2900
<b>SBM450/60Hz</b>	270/24	625	515	328	55	3.8	460	60	6.4	3520

### 卧式端吸泵

是离心式直连泵，设计紧凑，叶轮直接安装在电机延长轴上。

这些泵在初次灌注后有自吸功能。

所有泵带一个机械密封。

SBM 泵安装在水箱附近或顶部，可以抽吸含空气冷却液体，如乳化液或切削油，他们使用在高速车削，铣削或者磨削应用。更多信息，请参考技术信息的机械特性部分。

### 应用

流体类型  
冷却液  
冷却/切削油



流动黏度  
...45 mm<sup>2</sup>/s (45 cSt)

工作温度  
0...60° C

吸入高度  
5 m

### 结构

端盖	铸铁
径向叶轮	铸钢
轴	钢
机械密封	SiC

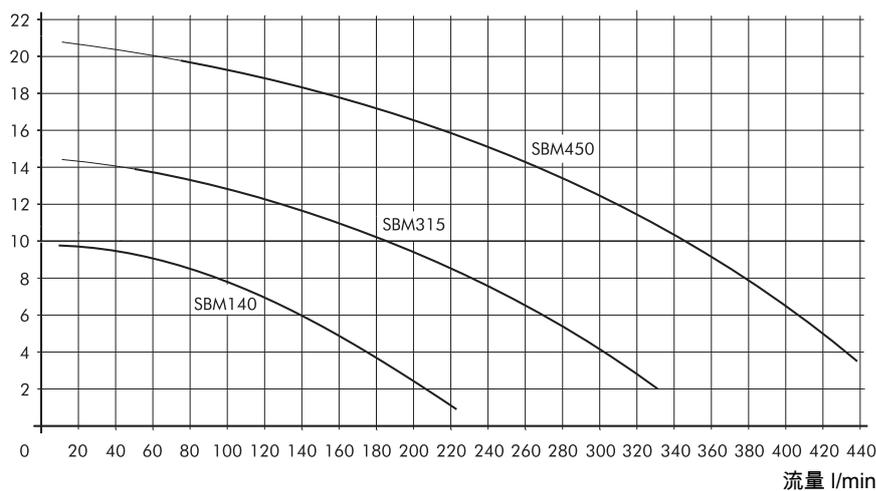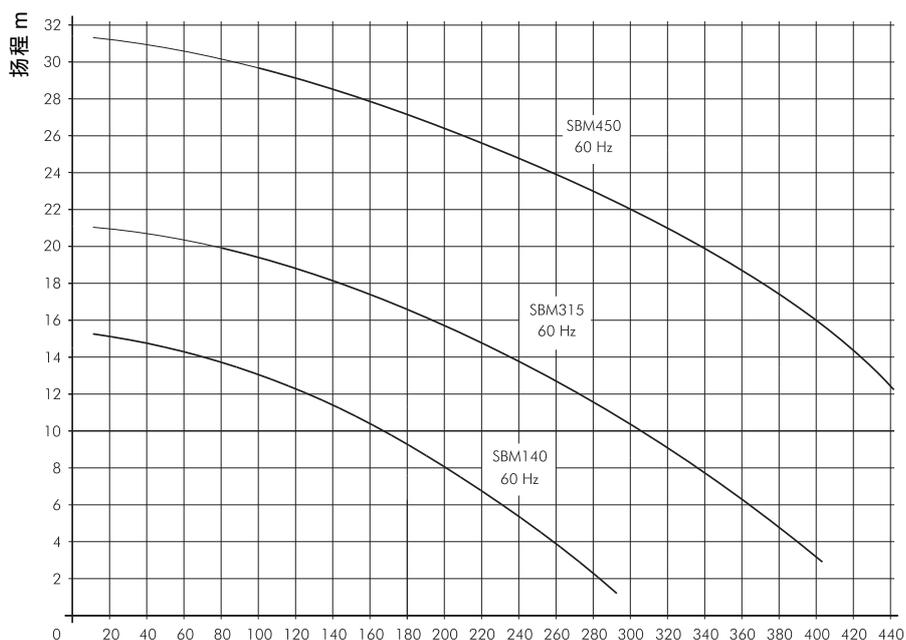

卧式端吸泵

**SBM140...450**

半开式叶轮





卧式端吸泵

**SBM140...450**

半开式叶轮





卧式端吸泵

**SBM140...450**

半开式叶轮



