


快吸式沉水泵


TL/STL141...146

轴向/半开式叶轮

TL141, 142

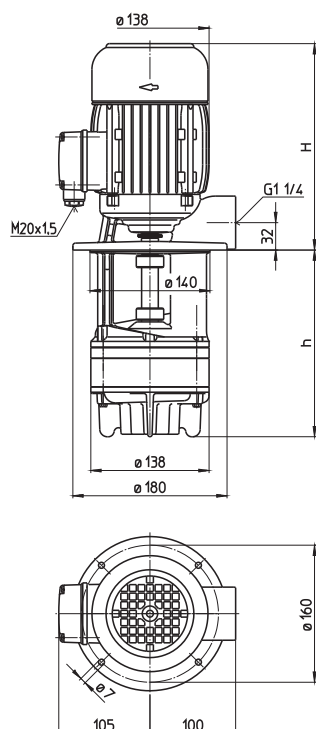

STL141...146

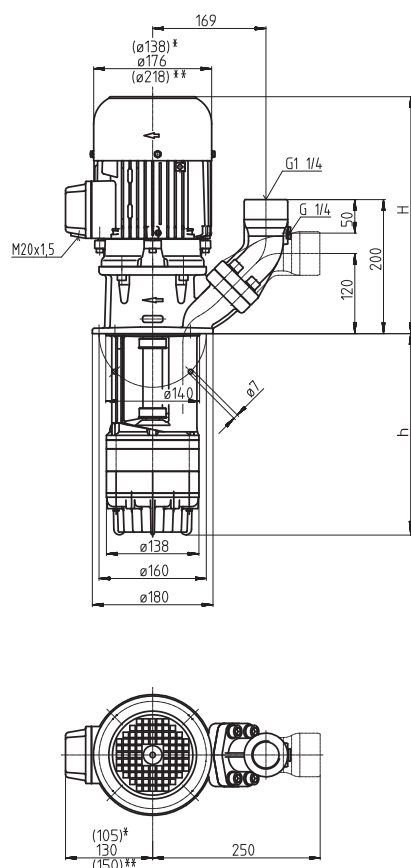

*) STL141, 142 尺寸
**) STL146 尺寸

型号	流量 在某个 扬程下 l/min /m	高度 H mm	沉水 深度 h mm	重量 kg	功率 kW	电压 V 3 ~	频率 Hz	电流 A	转速 1/min
TL141/150	100/10	264	150	15.5	0.63	220-240	50	2.70	2850
230			230	16.0		380-415	50	1.56	2850
300			300	17.5					
380			380	18.0	0.725	460	60	1.46	3425
470			470	19.5					
580			580	20.5					
TL142/180	100/20	291	180	19.0	1.1	220-240	50	4.33	2850
260			260	19.5		380-415	50	2.50	2850
330			330	21.0					
410			410	22.0	1.27	460	60	2.4	3440
500			500	24.0					
610			610	25.0					
STL141/150	100/10	334	150	22.5	0.63	220-240	50	2.70	2850
230			230	23.0		380-415	50	1.56	2850
300			300	24.0	0.725	460	60	1.46	3425
380			380	24.5					
470			470	26.0					
580			580	27.5					
STL142/180	100/20	361	180	25	1.1	220-240	50	4.33	2850
260			260	26		380-415	50	2.50	2850
330			330	27					
410			410	29	1.27	460	60	2.4	3440
500			500	30					
610			610	32					
STL143/220	100/30	406	215	36	1.7	220-240	50	6.24	2890
300			295	37		380-415	50	3.60	2890
370			365	38					
450			445	39	1.95	460	60	3.5	3480
540			535	40					
650			645	41					
STL144/250	100/40	439	250	41	2.2	220-240	50	7.8	2890
330			330	42		380-415	50	4.5	2890
400			400	43					
480			480	44	2.55	460	60	4.4	3480
570			570	46					
680			680	47					
STL145/300	100/50	439	300	46	2.6	220-240	50	9.30	2880
380			380	47		380-415	50	5.35	2880
450			450	48					
530			530	49	2.94	460	60	5.1	3480
620			620	50					
730			730	52					
STL146/330	100/62	478	335	57	3.3	220-240	50	11.6	2930
410			415	58		380-415	50	6.7	2930
480			485	60					
560			565	61	3.8	460	60	6.4	3520

快吸式沉水泵

配备了专利的"BRINKMANN 气液分离系统" 特别适用于抽送极度膨胀液体(乳化液，冷却/切削油)，针对车削,铣削或磨削的应用。
一旦液面达到吸入端时，快吸式沉水泵能快速进入稳定的工作状态。
STL 系列提供了一个**(SAE)**法兰 用于连接压力表。
该法兰可用于水平及垂直管路连接。

应用

流体类型
冷却液
冷却/切削油
流动黏度
...45 mm²/s (45 cSt)
工作温度
0...80° C

结构

泵体	铸铁
端盖	铸铁
轴向叶轮	铸钢
径向叶轮	黄铜
轴	钢
可选： 径向叶轮	铸钢

